



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.259  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.754  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.524  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.314

p max = 5.0 bar

Colours / Couleurs / Farbe / Colores




[B] Standard  
[T] + 10%  
[S] + 20%

For further details see page 8  
Pour plus d'informations consultez la page 8  
Sie können für eventuelle Rückfragen auf Seite 9 konsultieren  
Para otras informaciones ver la página 9

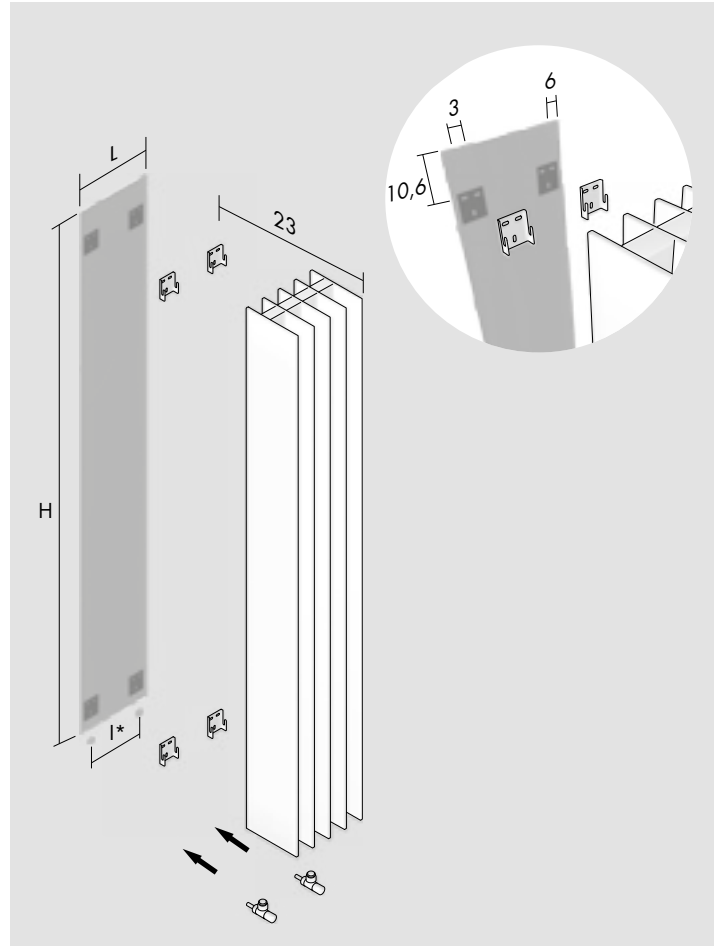



[F]

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

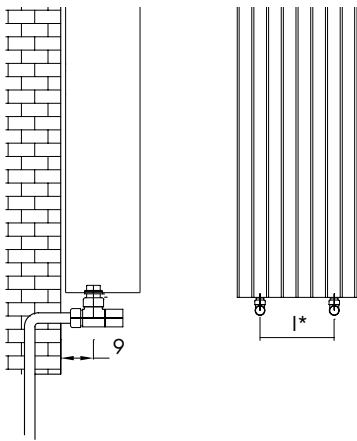

[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

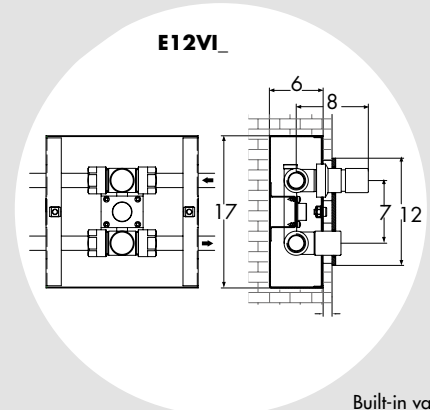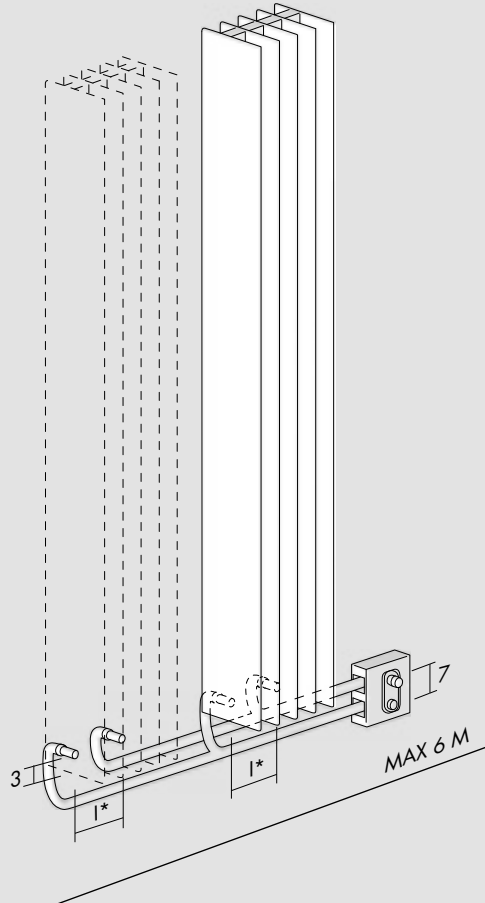

Built-in valves  
Vanne encastrer  
Einbaventile  
Válvulas de empotrar

I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

No. el.	H		59	66	68	88	150	180	200
	L	I*							
5	29.0	21.0	354	392	403	509	846	1 004	1 112
6	36.0	28.0	452	500	513	649	1 073	1 273	1 410
7	43.0	35.0	551	610	627	792	1 304	1 548	1 714
8	50.0	42.0	653	722	742	938	1 540	1 827	2 023
9	57.0	49.0	756	837	860	1 086	1 778	2 110	2 336
10	64.0	56.0	861	953	979	1 237	2 019	2 396	
11	71.0	63.0	967	1 071	1 100	1 390			
12	78.0	70.0	1 075	1 190	1 222	1 544			
13	85.0	77.0	1 184	1 310	1 346	1 700			
14	92.0	84.0	1 294	1 432	1 471	1 858			
15	99.0	91.0	1 404						
16	106.0	98.0	1 516						

[FD] [FS]	I*	53 cm	60 cm	62 cm	82 cm			
		PI*	AL*	GH*	GH*			
	Lt*	0.28	0.30	0.31	0.36	0.54	0.62	0.68

Standard connection on demand for replacement radiators with distance between pipes centres plate (PI\*), aluminium (AL\*) and cast iron (GH\*). Indicate whether the connection is to the right or left.

Raccordement standard sur demande pour le remplacement des radiateurs avec entraxe panneaux (PI\*), aluminium (AL\*) et en fonte (GH\*). Indiquez si le raccordement est à droite ou à gauche.

Standard Anschlüsse für Heizkörperwechsel, der Achsabstand von Platte (PI\*), oder Aluminium (AL\*), oder Gusseisen hat (GH\*). Spezifizieren Sie wenn Achsabstand links oder rechts ist.

Conexiones sobre pedido para la sustitución de radiadores con entre ejes plancha (PI\*), aluminio (AL\*) y hierro fundido (GH\*). Indicar si la conexión está a la derecha o izquierda.


Optional



(P\* = 234)

Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra


[BIAN] **E12SQB**  
[CROM] **E12SQR**



(P\* = 236)

Built-in valves  
Einbauventile  
Vanne encastrer  
Válvulas de empotrar


[BIAN] **E12VIB**  
[CROM] **E12VIR**



⚠ (P\* 236)

Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático

[BIAN] **TTB**  
[CROM] **TTR**



Ø ≤ 16 mm

[BIAN] **CTB**  
[CROM] **CTR**

16 mm < Ø < 24 mm

[BIAN] **CWB**  
[CROM] **CWR**

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
P\* = page / page / Seite / página



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.245  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.765  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.541  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.332

p max = 5.0 bar

### Colours / Couleurs / Farbe / Colores


[B] Standard  
[T] + 10%  
[S] + 20%

For further details see page 8  
Pour plus d'informations consultez la page 8  
Sie können für eventuelle Rückfragen auf Seite 9 konsultieren  
Para otras informaciones ver la página 9.

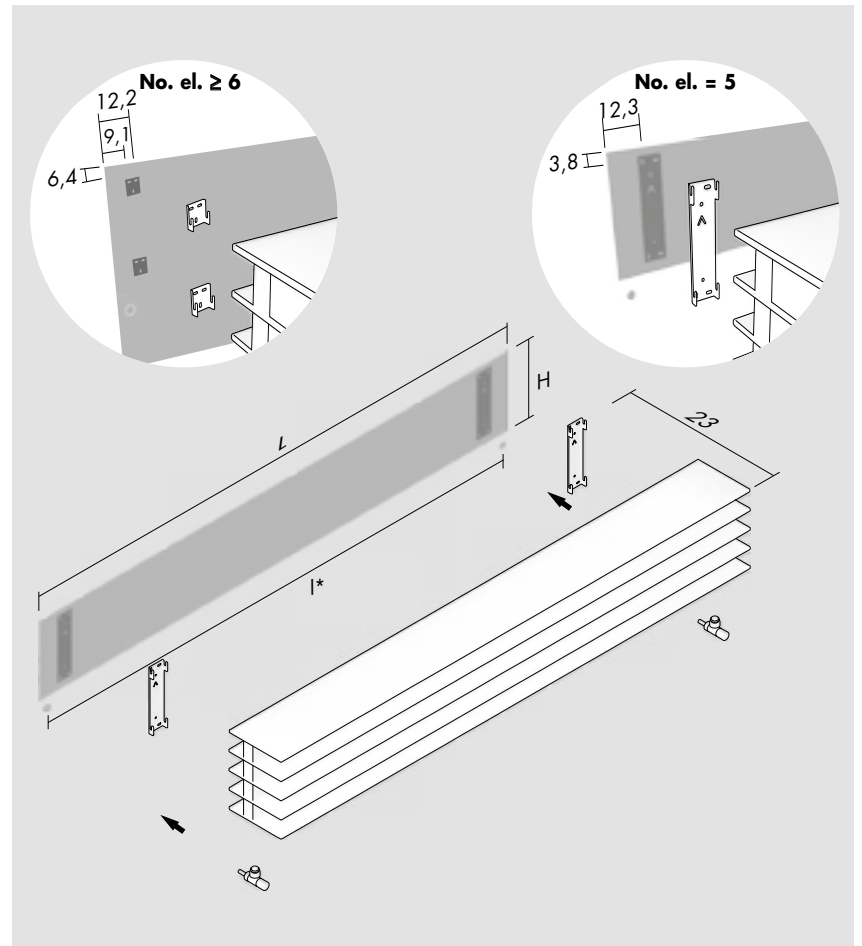


### [F]

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

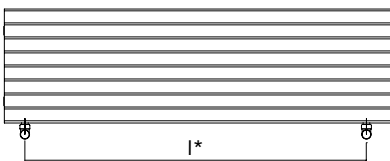

### [H]



Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

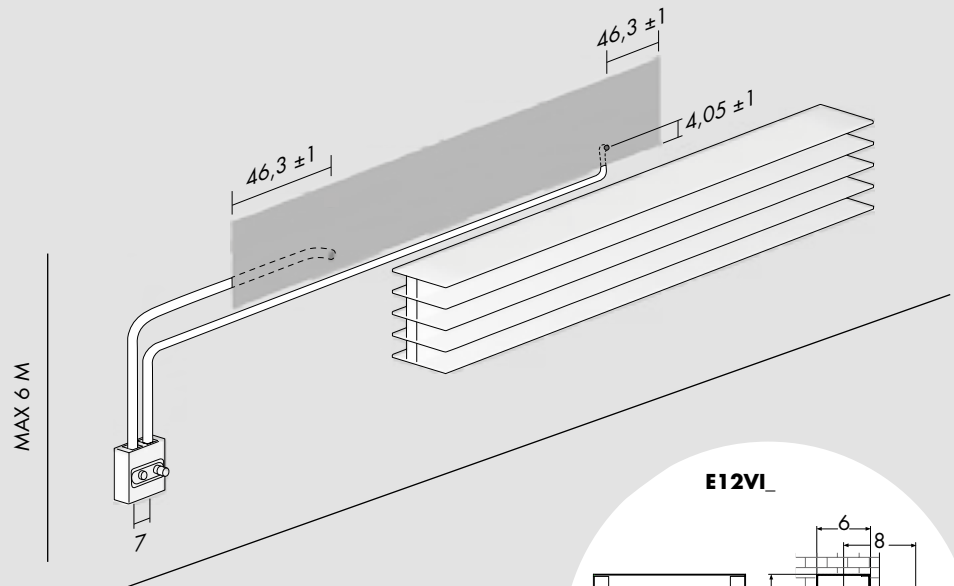


Built-in valves  
Vanne encastrer  
Einbauventile  
Válvulas de empotrar

I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

No. el.	H	L	59	66	68	88	150	180	200
5	29.0		307	341	352	446	728	874	978
6	36.0		364	404	417	529	863	1 037	1 160
7	43.0		419	465	480	609	993	1 194	1 335
8	50.0		473	525	542	688	1 121	1 347	1 507
9	57.0		526	584	603	765	1 247	1 498	1 676
10	64.0		579	642	663	841	1 371	1 647	
11	71.0		630	699	722	916			
12	78.0		682	756	781	991			
13	85.0		733	813	840	1 066			
14	92.0		785	870	899	1 140			
15	99.0		836						
16	106.0		887						

I*		53 cm	60 cm	62 cm	82 cm	144 cm	174 cm	194 cm
[H] special connection / raccord spéciale / speziell Anschluss / conexión especial		58 cm	88 cm	108 cm				
Lt*		0.28	0.29	0.30	0.36	0.54	0.62	0.68


### Optional



(P\* = 234)

Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra


[BIAN] **E12SQB**  
[CROM] **E12SQR**




(P\* = 236)

Built-in valves  
Vanne encastrer  
Einbauventile  
Válvulas de empotrar


[BIAN] **E12VIB**  
[CROM] **E12VIR**



 (P\* 236)

Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático

[BIAN] **TTB**  
[CROM] **TTR**



Ø ≤ 16 mm  
[BIAN] **CTB**  
[CROM] **CTR**

16 mm < Ø < 24 mm  
[BIAN] **CWB**  
[CROM] **CWR**

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
P\* = page / page / Seite / página