


# PRISMA 2.0

B1F

STANDARD



OPTIONAL

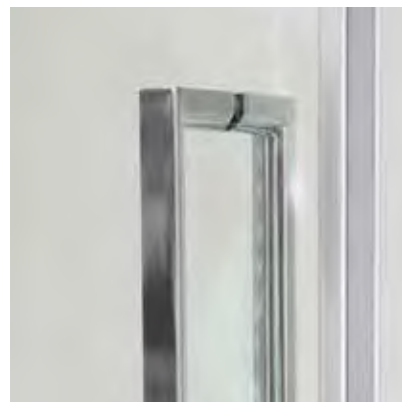

8 / 6 mm

Coppia maniglie interasse 32 cm  
Couple wheelbase handles 32 cm  
Manijas de par entre ejes 32 cm  
Par de alças interligadas 32 cm  
AA0420/Q

Materiali e finiture - Materials and finishings - Materiales y acabados - Materiais e acabamentos



Caratteristiche tecniche - Technical features - Características técnicas - Características técnicas




**TECNOVETRO**

Maggiori info pag. 9 - More info page 9  
Más información pág. 9 - Mais informações pág 9

**PROTECTIVE**

|       |       |       |
|-------|-------|-------|
| P → F | D → R | 8 → J |
| L → I | 7 → C | T → 5 |
| B → S | X → Q | B → S |
| K → N | O → H | 6 → W |
| X → Q | 9 → V | 7 → C |

- Porta battente - Pivot door  
- Puerta batiente - Porta de balanço




## 8 mm


| COD.                                | cm            | "A" | "B" | Kg | n° | finiture profili / profiles finishings / acabados de perfil / acabamentos de vidro |       |       |  |  |
|-------------------------------------|---------------|-----|-----|----|----|--|-------|-------|--|--|
|                                     |               |     |     |    |    | P (€)  | D (€) | X (€) |  |  |
| Prisma 2.0 B1F / 70<br>R8B1F070*/_  | 68,5 - 70,5   | 41  | 22  | 33 | 2  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 75<br>R8B1F075*/_  | 73,5 - 75,5   | 46  | 22  | 35 | 2  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 80<br>R8B1F080*/_  | 78,5 - 80,5   | 51  | 22  | 39 | 2  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 90<br>R8B1F090*/_  | 88,5 - 90,5   | 56  | 27  | 44 | 2  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 100<br>R8B1F100*/_ | 98,5 - 100,5  | 61  | 32  | 49 | 2  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 120<br>R8B1F120*/_ | 118,5 - 120,5 | 66  | 47  | 58 | 2  | Q  |       |       |  |  |

## 6 mm


| COD.                                | cm            | "A" | "B" | Kg | n° | finiture profili / profiles finishings / acabados de perfil / acabamentos de vidro |       |       |  |  |
|-------------------------------------|---------------|-----|-----|----|----|--|-------|-------|--|--|
|                                     |               |     |     |    |    | P (€)  | D (€) | X (€) |  |  |
| Prisma 2.0 B1F / 70<br>R6B1F070*/_  | 68,5 - 70,5   | 41  | 22  | 21 | 1  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 75<br>R6B1F075*/_  | 73,5 - 75,5   | 46  | 22  | 23 | 1  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 80<br>R6B1F080*/_  | 78,5 - 80,5   | 51  | 22  | 24 | 1  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 90<br>R6B1F090*/_  | 88,5 - 90,5   | 56  | 27  | 27 | 1  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 100<br>R6B1F100*/_ | 98,5 - 100,5  | 61  | 32  | 30 | 1  | Q  |       |       |  |  |
| Prisma 2.0 B1F / 120<br>R6B1F120*/_ | 118,5 - 120,5 | 66  | 47  | 33 | 1  | Q  |       |       |  |  |

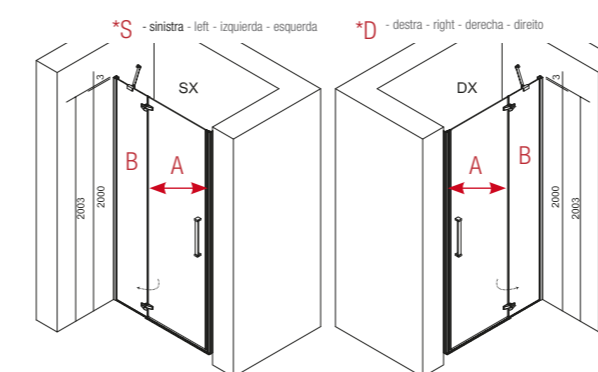


Profili a muro - Wall profile  
Perfil de pared - Perfil de parede



Estensibilità - Extensibility  
Extensibilidad - Extensibilidade

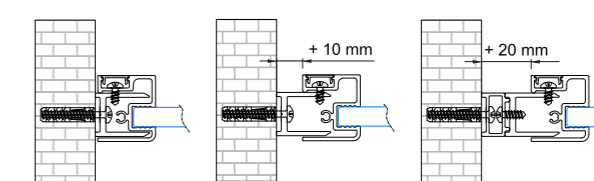

Profili di compensazione allunga di 1 cm  
Adjustment profile of 1 cm  
Perfil compensador prolongación 1 cm  
Perfis de compensação 1 cm

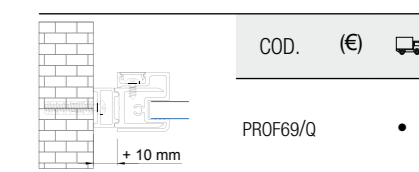


Vetro specchio - Glass mirror - Espejo de cristal - Espelho de vidro



D= Q+30% vs P → R8B1F\*\_\*/QP (speciale / special)

Schema rilievo misure - Scheme for measure-taking  
Esquema de medición - Medir o padrão de alívio

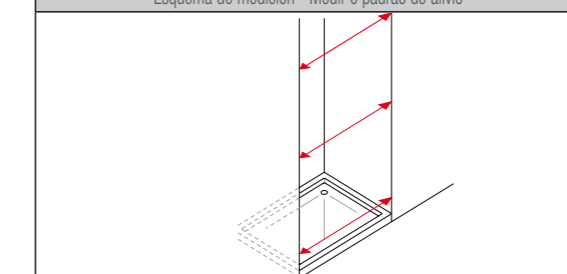

Prodotti speciali - Special products - Medidas especiales factibles - Medidas especiais

| altezza cm.<br>height cm.<br>Altura cm.<br>Altura cm. | max | +30%     |      |       | +20%  |  |  | +30% |  |  |
|---|-----|----------|------|-------|-------|--|--|------|--|--|
|   |     | standard |      |       |       |  |  |      |  |  |
| min   | 140 | 68,5     | 88,5 | 118,5 | 138,5 |  |  |      |  |  |